

TRAILER SPECIFICATION


MAKE	Solacraft	COUPLING	50mm or ring coupling
MODEL	W6-MCM	TYRE/RIM	31 x 10.5 R 15 LT
TYPE	Single Solid Axle Solar	BRAKE	Over-ride cable w/ handbrake
TARE/AGG kg	1350 / 1500	L x W x H mm	4050 x 1781 x 2010
MAST	Vertical fixed, telescopic SHS	MAST WINCH	Brake Hand Winch
SOLAR	3 x 400w Sunpower MAX 3	REGULATOR	Victron Smart Solar 100 50
BATTERY	6 x 150Ah 12V Gel	CONNECTIVITY	Victron Connect

FEATURES

- Rugged single axle chassis with lockable ventilated battery enclosure
- Heavy-duty battery drawers for safe and easy access to batteries
- Internal mounting points for multiple IP66 rated equipment cabinets
- Victron Energy regulators with Bluetooth and VE.Connect remote access
- Rear forklift pockets and cyclone tie down points
- Hot dip galvanised chassis and powder coating on most components
- LED trailer lighting
- Heavy duty suspension and all terrain off road tyres
- 4 x heavy duty height adjustable outriggers (hand or power pack operation)
- Lockable Battery Isolation Switch
- 4 x Wheel Chocks mounted on wheel guards
- Wheel Nut Indicators
- Air filtration foam in ventilation openings
- 24V DC power with voltage conversion to suit any end user equipment

Industry leading high efficiency solar system

Drawbar FRP working platform

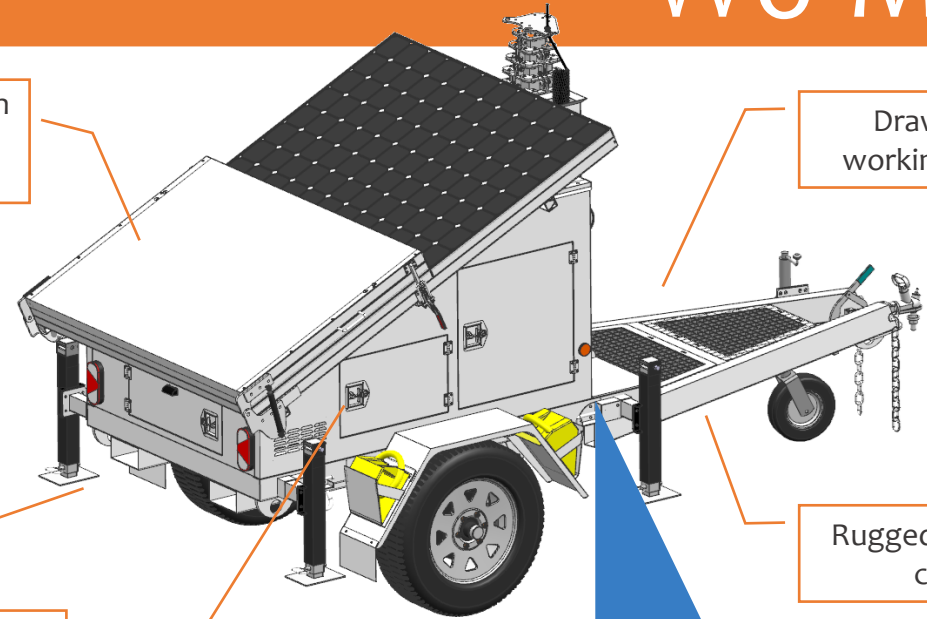

Forklift lifting pockets and cyclone tie down points

Heavy-duty battery drawers to improve access

Rugged heavy-duty chassis

